

# SYTFB100RH4S

2-18GHz Surface Mount Bandpass Filter

#### Description

Yantel's surface mount catalog bandpass filters utilize Yantel's low loss temperature stable materials which offer small size and minimal performance variation over temperature. The catalog BPF's are offered in a variety of frequency bands, which offers a drop in solution with highly repeatable performance.


## Features

- Small Size
- Fully Shielded Component
- Solder Surface Mount Package
- Moisture Sensitivity Level: MSL1
- Frequency Stable over Temperature
- Operating & Storage Temp: -55°C to +125°C
- Characteristic Impedance: 50Ω

Parameter	Frequency Range (GHz)	Min	Тур.	Max			
Insertion Loss (dB)	2.0 - 18.0		2.0	3.0			
Return Loss (dB)	2.0 - 10.0	10.0	15.0				
Low Side Rejection (dB)	DC - 1.0	25.0	35.0				
High Side Rejection (dB)	21.5 - 35.0	20.0	30.0				
CW Input Power** (W)	5						
Size (L x W x H)	8.64 x 4.32 x 2.16 mm						

\*Electrical specifications based on typical probed performance at room temperature. Insertion loss

shall vary ±0.5dB over temperature. \*\*Power rating assumes the component will be mounted to a PCB with good thermally conducting ground vias as outlined in the recommended PCB layout that are connected to an adequate heat sink. Max power is based on 125°C base temperature

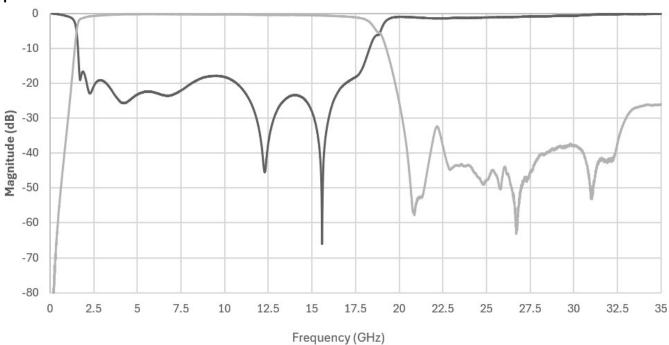

Specifications\*

**Typical Measured Performance** 


\*Typical de-embedded measured performance mounted on a connectorized test fixture. DEB is 0.254mm RO4350B with 50.00hm CPW ground traces going into the ports at room temperature.



# **SYTFB100RH4S** 2-18GHz Surface Mount Bandpass Filter

# **Physical Dimensions**

Units = mm

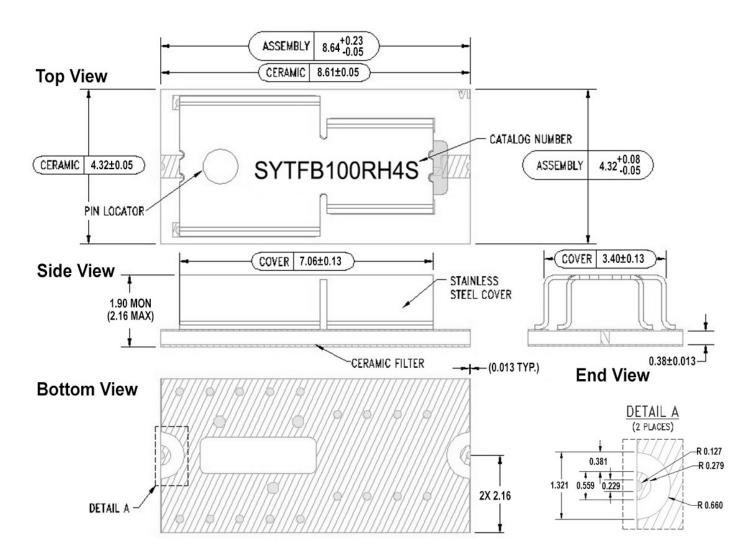

#### Notes :


- 1. Termination Finish:
  - ENIG: 76-152 µm Au over 1270 µm Ni
- 2. Maximum Assembly Process Temperature: 250°C
- 3.Dimension tolerance: ±0.05



# **SYTFB100RH4S** 2-18GHz Surface Mount Bandpass Filter

# Recommended PCB Layout

Units = mm

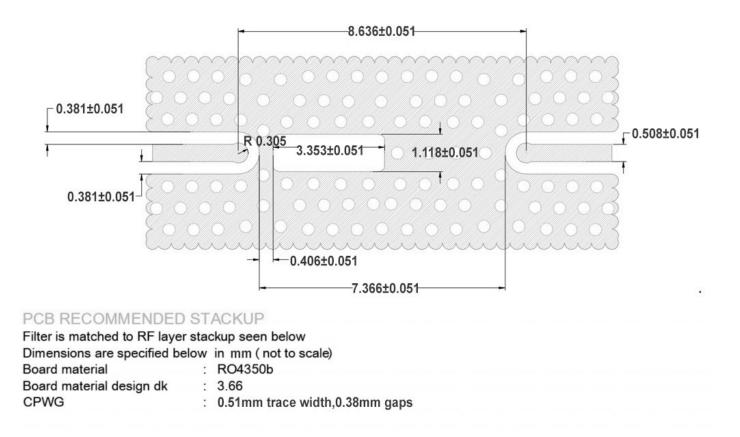

	0.38mm	0.38mm	0.51mm	0.38mm	THICKNESS (NOM)	
Layer 1		RF	<u> </u>	GND	1 oz / 1 oz Copper Plate Up	
			RO4350b			0.25mm
Layer 2			GND		<u> </u>	

### Note:

- 50Ω trace dimensions are application specific.
- Ensure adequate grounding beneath the part.
- \*\*\*Note avoid copper within the voided area in the center under the part.