


Manual Step Attenuator

- ◆ DC to 5.8GHz
- ◆ 0 to 40dB in 10dB Step
- ◆ 5 Watt
- ◆ Choice of SMA or N Type Connectors

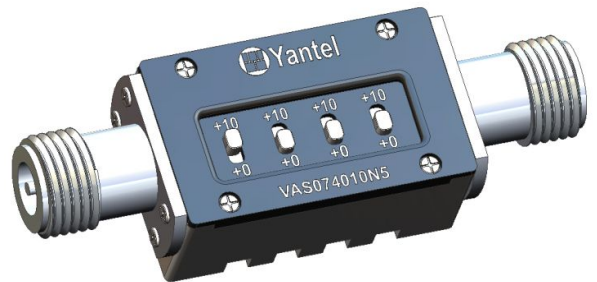

Features

- Using advanced microstrip technology, ultra-small size
- Attenuation values are adjustable in a power-on state, no sudden big reflection.
It adopts an innovative technology, and thus it eliminates sudden big reflection in attenuators when attenuation is being adjusted, preventing the preliminary RF circuit from being burnt, and keeping the system stable
- Step values: 10dB, 10dB, 10dB, 10dB
- 5 attenuation values
- High attenuation accuracy, low insertion loss
- High adjustment accuracy
- Low cost – High Performance
- Adjusting the transmitting (receiving) distance of RF signal precisely. Adjusting accuracy is limited to 5cm.
- Switch repeatability avg.> 10000 operations (5000 cycles) per switch.
- PC(Polycarbonate) Switch, operating temperature of 120°C is available.
- Attenuation values are adjustable in a power-on state, test data can be read continuously, no interruption.

Specifications


Frequency Range DC to 5.8GHz
Attenuation 0 to 40dB
Step Value 10dB
Insertion loss at 0dB (typ.)
 0.8dB DC to 4 GHz
 1dB 4 to 5 GHz
 1.25dB 5 to 5.8 GHz

Attenuation Accuracy (typ.)
 -1.2dB~+3dB DC to 4 GHz
 +5.0 dB 4 to 5 GHz
 +6.5dB 5 to 5.8 GHz

Nominal Impedance 50 Ohm
Average Power 5 Watt
Operating Temperature -40°C to +85°C

Characteristic

For example the testing curves of VAS074010N51 of 40dB

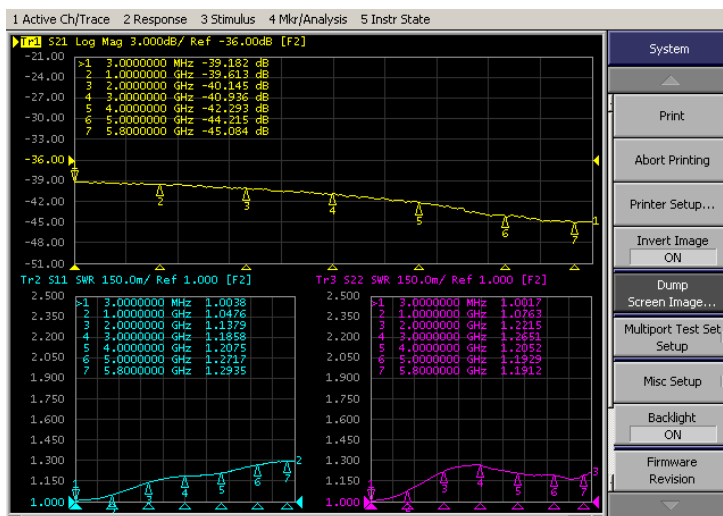

Freq. Range (GHz)	VSWR(:1)	
	Typ.	Max.
DC to 5.8	1.3	1.65

Model No. Description

VAS ** ** ** * * *
 Type Attenuation Range Step Value Connector Type Max. Power Connector Option

VAS: Step Variable Attenuator

Type: 07 represents type number

Attenuation Range: Maximum attenuation.

Connector Type: S and N available. S is SMA and N is N type connector.

Max. Power: 2 and 5 are available, currently 2W and 5W are available.


Connector Options:

Options	IO
1	Female/Female
2	Male/Female
3	Male/Male


Connector Position: "A" represents back connectors, without "A" represents left and right connectors.

Package Outlines

SMA Connector Unit:mm (inch)

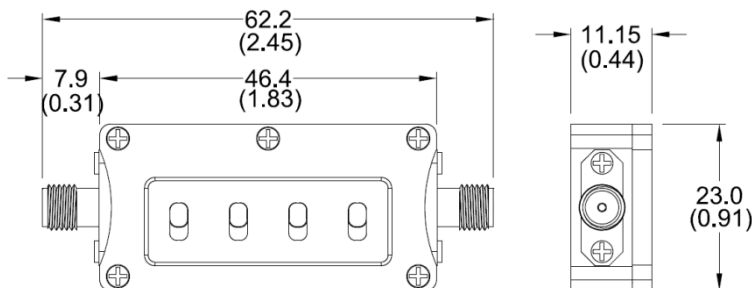

N-type Connector

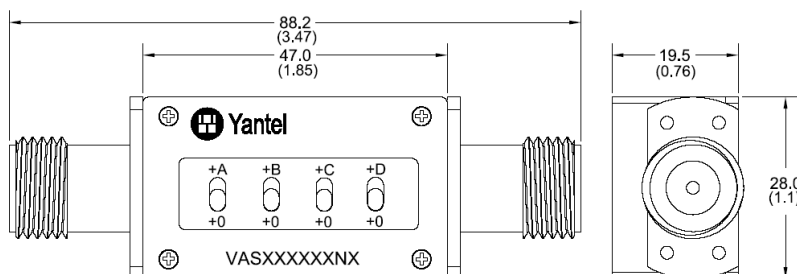


NOTE:

1. ALL dimensions shown in mm (tolerance: +/-0.2mm) unless stated otherwise
2. RoHS Compliant in accordance with EU Directive (2011/65/EU)

Yantel Corporation

Add: 3F, Building 3, Southern District 2 of ZhongGuan Honghualing Industrial Park, Xili, Nanshan, Shenzhen, China
 Tel: 86-755-8355-1886 Fax: 86-755-8355-2533

Attention

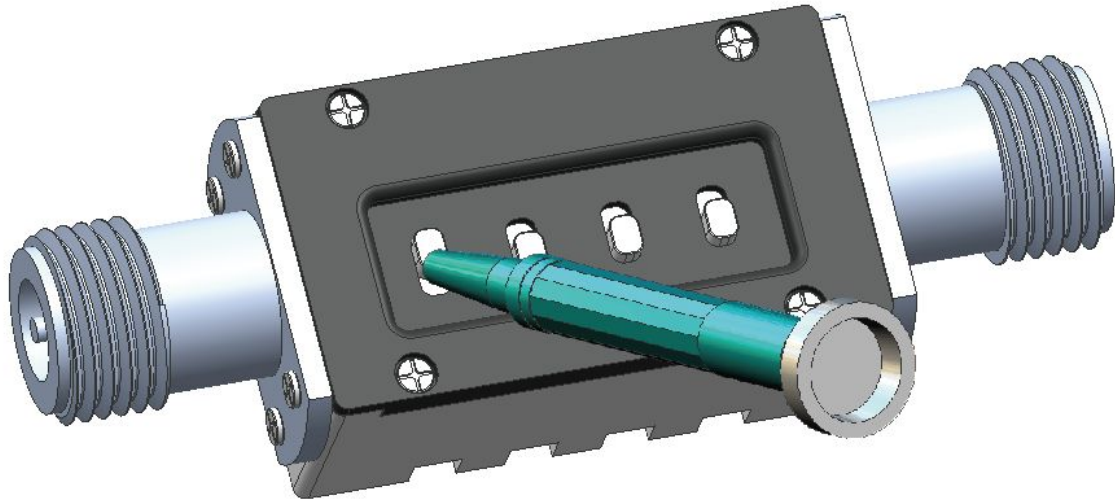

It is much easier to adjust the switch by tools like plastic screw driver.