

## Fixed Attenuator

**DC to 6 GHz**
**3 dB**
**2 Watt**
**SMA Stainless Steel Connectors**

### Features

- High attenuation accuracy
- Small VSWR
- Stainless Steel
- Ceramic chip
- Low cost-high performance

### Specifications

Frequency Range	DC to 6 GHz
Attenuation	3 dB
Attenuation Accuracy ( Max. )	± 0.20 dB over DC - 3 GHz ± 0.30 dB over 3 - 4 GHz ± 0.40 dB over 3 - 6 GHz
Nominal Impedance	50 Ohm
Average Power	2 Watt
Operating Temperature	-55 to +150

### Model No. Description

**FATXXXXXXXX**
**X**- M=Ultra-small size

**X**- Material: (no code)=Brass  
(S)=Stainless steel

**X**- power handling: 2W or 5W.

**X**- connector type: SMA, N type or  
SMB connector.

**XX**- attenuation: \*\*dB.

**XX**- frequency range, 06: DC to 6GHz

14: DC to 14GHz

18: DC to 18GHz.


FREQ. RANGE (GHz)	Typical VSWR(:1)	Maximum VSWR(:1)
DC to 3	1.10	
3 to 4	1.15	
4 to 6	1.20	
DC to 6		1.25

### Material & Plating


Parts	Material	Plating(Micro-inch)
Body & Nut	Stainless Steel	Passivated
Contact (female & male)	Beryllium Copper	Gold 30
Insulator	Teflon	

### Characteristic

For example the testing curves of FAT0603S2SM

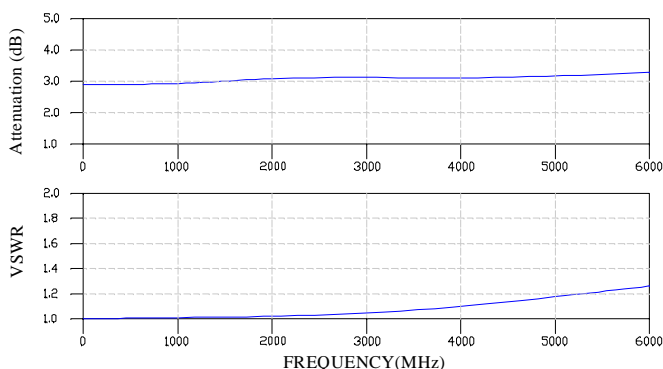

### Package Outlines



Package type: SMA

Note: all dimensions shown in mm &amp; inch

#### Yantel Corporation

Add : 3F, Building 3, Southern District 2 of Zhongguan Honghualing Industrial Park, Xili, Nanshan, Shenzhen, China

Tel : 86-755-8355-1886 Fax : 86-755-8355-2533

 For detailed performance specs & shopping online see Yantel web site : [www.yantel-corp.com](http://www.yantel-corp.com)