


#### Description

The HC0812F03 is a low profile, high performance 3dB hybrid coupler in a new easy to use, manufacturing friendly surface mount package. The HC0812F03 is designed particularly for balanced power and low noise amplifiers, plus signal distribution and other applications where low insertion loss and tight amplitude and phase balance is required. It can be used in high power applications up to 10 watts.

Parts have been subjected to rigorous qualification testing and they are manufactured using materials with coefficients of thermal expansion (CTE) compatible with common substrates such as FR4, G-10, RF35, RO4003 and polyimide. Produced with 6 of 6 RoHS compliant tin immersion finish

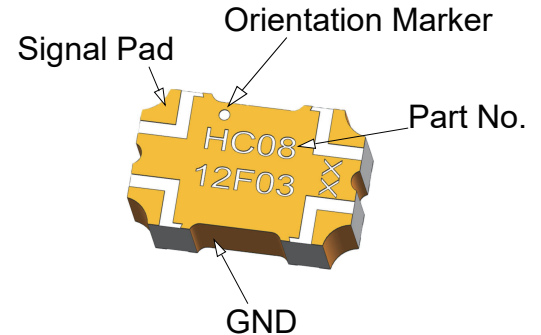

#### Features:

- 8000-12000 MHz
- High Power
- Very Low Loss
- Tight Amplitude Balance
- High Isolation
- Production Friendly
- Tape and Reel
- Lead-Free


#### Electrical Specifications

| Frequency            | Isolation                     | Insertion Loss         | Return Loss | Amplitude Balance |
|----------------------|-------------------------------|------------------------|-------------|-------------------|
| <i>MHz</i>           | <i>dB Min</i>                 | <i>dB Max</i>          | <i>dB</i>   | <i>dB Max</i>     |
| 8000 -12000          | 20                            | 0.5                    | 18.5        | ± 0.4             |
| <b>Phase Balance</b> | <b>Power</b>                  | <b>Operating Temp.</b> |             |                   |
| <i>Degrees</i>       | <i>Avg. CW Watts at 95 °C</i> | <i>°C</i>              |             |                   |
| 90 ± 3.0             | 10                            | -40 to +105            |             |                   |

#### Notes:

1. All the above data are based on specified demo board.
2. Insertion loss: Thru board loss has been removed.

#### Mechanical Outline

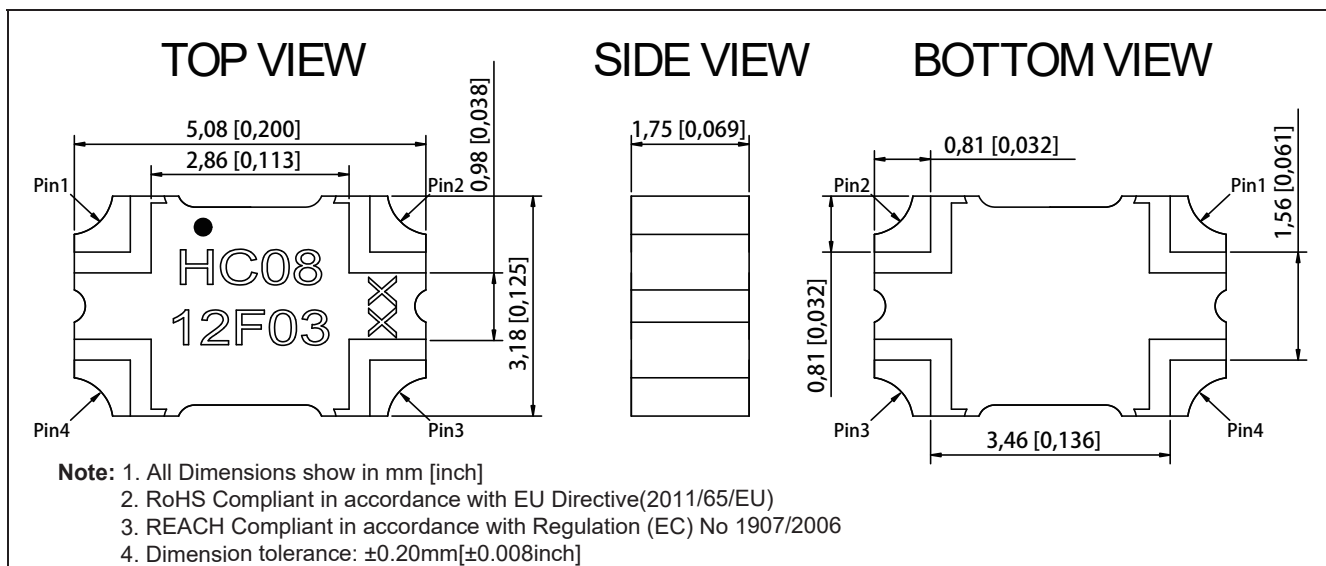


#### Yantel Corporation

Add: 3F, Building 3, Southern District 2 of Zhongguan Honghualing Industrial Park, Xili, Nanshan, Shenzhen, China  
 Tel: 86-755-8355-1886 Fax: 86-755-8355-2533

For detailed performance specs & shopping online see Yantel web site : [www.yantel-corp.com](http://www.yantel-corp.com)

#### Hybrid Coupler Pin Configuration

The HC0812F03 has an orientation marker to denote Pin1. Once port one has been identified the other ports are known automatically. Please see the chart below for clarification:

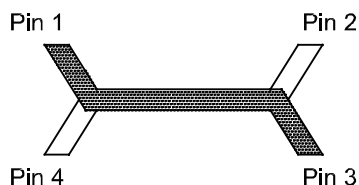

| Configuration    | Pin 1                     | Pin 2                     | Pin 3                     | Pin 4                     |
|------------------|---------------------------|---------------------------|---------------------------|---------------------------|
| <b>Splitter</b>  | Input                     | Isolated                  | -3dB $\angle \theta - 90$ | -3dB $\angle \theta$      |
| <b>Splitter</b>  | Isolated                  | Input                     | -3dB $\angle \theta$      | -3dB $\angle \theta - 90$ |
| <b>Splitter</b>  | -3dB $\angle \theta - 90$ | -3dB $\angle \theta$      | Input                     | Isolated                  |
| <b>Splitter</b>  | -3dB $\angle \theta$      | -3dB $\angle \theta - 90$ | Isolated                  | Input                     |
| <b>*Combiner</b> | $A \angle \theta - 90$    | $A \angle \theta$         | Isolated                  | Output                    |
| <b>*Combiner</b> | $A \angle \theta$         | $A \angle \theta - 90$    | Output                    | Isolated                  |
| <b>*Combiner</b> | Isolated                  | Output                    | $A \angle \theta - 90$    | $A \angle \theta$         |
| <b>*Combiner</b> | Output                    | Isolated                  | $A \angle \theta$         | $A \angle \theta - 90$    |

\*Note: "A" is the amplitude of the applied signals. When two quadrature signals with equal amplitudes are applied to the coupler as described in the table, they will combine at the output port. If the amplitudes are not equal, some of the applied energy will be directed to the isolated port.

#### Yantel Corporation

Add: 3F, Building 3, Southern District 2 of Zhongguan Honghualing Industrial Park, Xili, Nanshan, Shenzhen, China  
Tel: 86-755-8355-1886 Fax: 86-755-8355-2533

For detailed performance specs & shopping online see Yantel web site : [www.yantel-corp.com](http://www.yantel-corp.com)

#### Definition of Measured Specifications

| Parameter                                    | Definition                                                                                             | Mathematical Representation                                                                                                                                |
|----------------------------------------------|--------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>VSWR</b><br>(Voltage Standing Wave Ratio) | The impedance match of the coupler to a 50Ω system. A VSWR of 1:1 is optimal.                          | $VSWR = \frac{V_{max}}{V_{min}}$<br>Vmax = voltage maxima of a standing wave<br>Vmin = voltage minima of a standing wave                                   |
| <b>Return Loss</b>                           | The impedance match of the coupler to a 50Ω system. Return Loss is an alternate means to express VSWR. | $\text{Return Loss (dB)} = 20 \log \frac{VSWR + 1}{VSWR - 1}$                                                                                              |
| <b>Insertion Loss</b>                        | The input power divided by the sum of the power at the two output ports.                               | $\text{Insertion Loss (dB)} = 10 \log \frac{P_{in}}{P_{cpl} + P_{transmission}}$                                                                           |
| <b>Isolation</b>                             | The input power divided by the power at the isolated port.                                             | $\text{Isolation (dB)} = 10 \log \frac{P_{in}}{P_{iso}}$                                                                                                   |
| <b>Phase Balance</b>                         | The difference in phase angle between the two output ports.                                            | Phase at coupled port – Phase at transmission port                                                                                                         |
| <b>Amplitude Balance</b>                     | The power at each output divided by the average power of the two outputs.                              | $10 \log \left( \frac{P_{cpl}}{P_{cpl} + P_{transmission}} \right) \text{ or } 10 \log \left( \frac{P_{transmission}}{P_{cpl} + P_{transmission}} \right)$ |

#### Test Method


1. Calibrating your vector network analyzer.
2. Connect the VNA 4 Port to DUT respectively.
3. Measure the data of coupling through port 1 to port 4(S41).
4. Measure the data of transmission through port 1 to port 3(S31).
5. Measure the data of isolation through port 1 to port 2(S21).
6. Measure the data of phase port 4 & port 3(port 1 feeding).
7. Measure the data of return loss port 1, port 2, port 3 & port 4.
8. According to the above data to calculate insertion loss, amplitude balance & phase.

Note:

1. When calculating insertion loss at room temperature, demo board loss should be removed from both coupling & transmission data.

Please refer to the below table for demo board loss :

| Frequency Range(MHz) | Demo Board Loss (dB) @25°C |
|----------------------|----------------------------|
| <b>470-860</b>       | 0.07                       |
| <b>800-1000</b>      | 0.10                       |
| <b>1200-1700</b>     | 0.15                       |
| <b>1700-2000</b>     | 0.15                       |
| <b>2000-2300</b>     | 0.20                       |
| <b>2300-2700</b>     | 0.25                       |

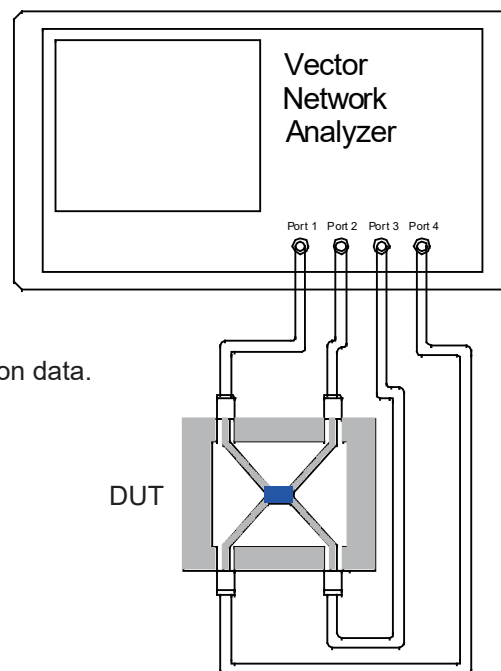


#### Yantel Corporation

Add: 3F, Building 3, Southern District 2 of Zhongguan Honghualing Industrial Park, Xili, Nanshan, Shenzhen, China

Tel: 86-755-8355-1886 Fax: 86-755-8355-2533

For detailed performance specs & shopping online see Yantel web site : [www.yantel-corp.com](http://www.yantel-corp.com)


## Recommended PCB Layout

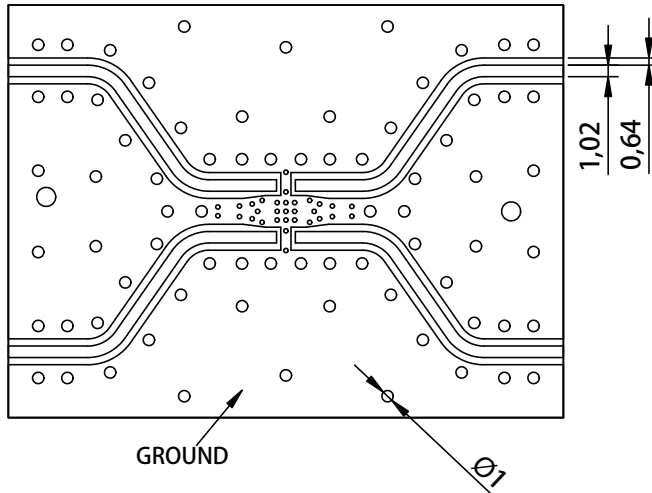

### NOTE:

1. 50Ω line width is shown above designing from Rogres 4350B dielectric thickness 0.508mm; copper 0.5 OZ.
2. Bottom side of the PCB is continuous ground plane.
3. All dimensions shown in mm [inch].

## Reflow Profile

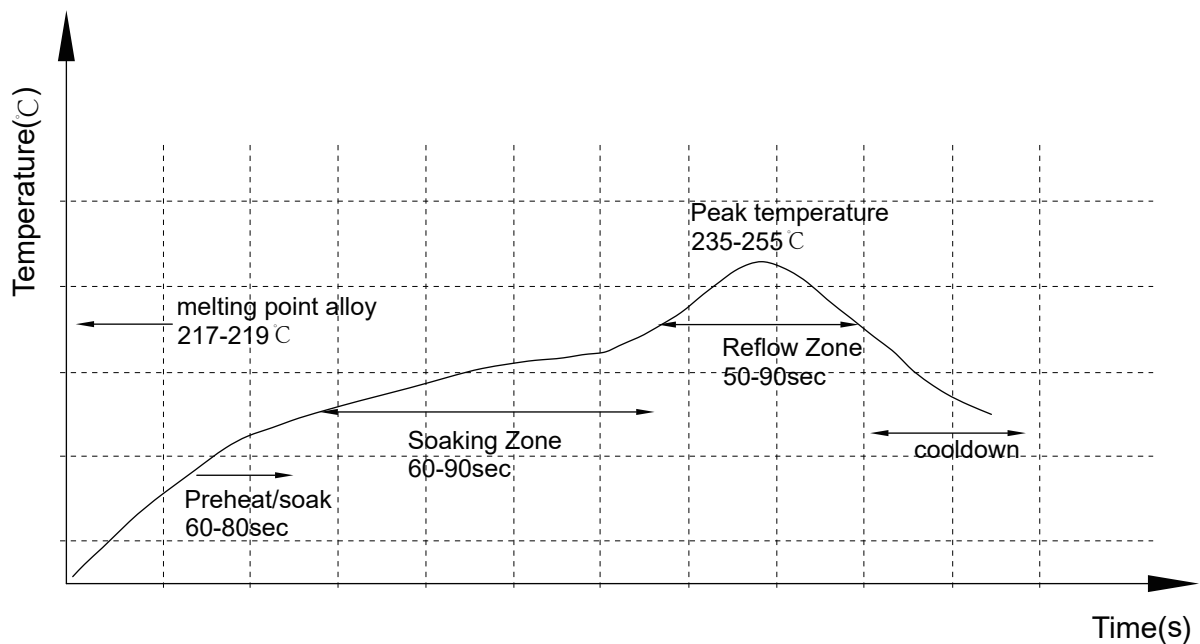


## Yantel Corporation

Add: 3F, Building 3, Southern District 2 of Zhongguan Honghualing Industrial Park, Xili, Nanshan, Shenzhen, China  
Tel: 86-755-8355-1886 Fax: 86-755-8355-2533

For detailed performance specs & shopping online see Yantel web site : [www.yantel-corp.com](http://www.yantel-corp.com)

#### Reliability Test Flow

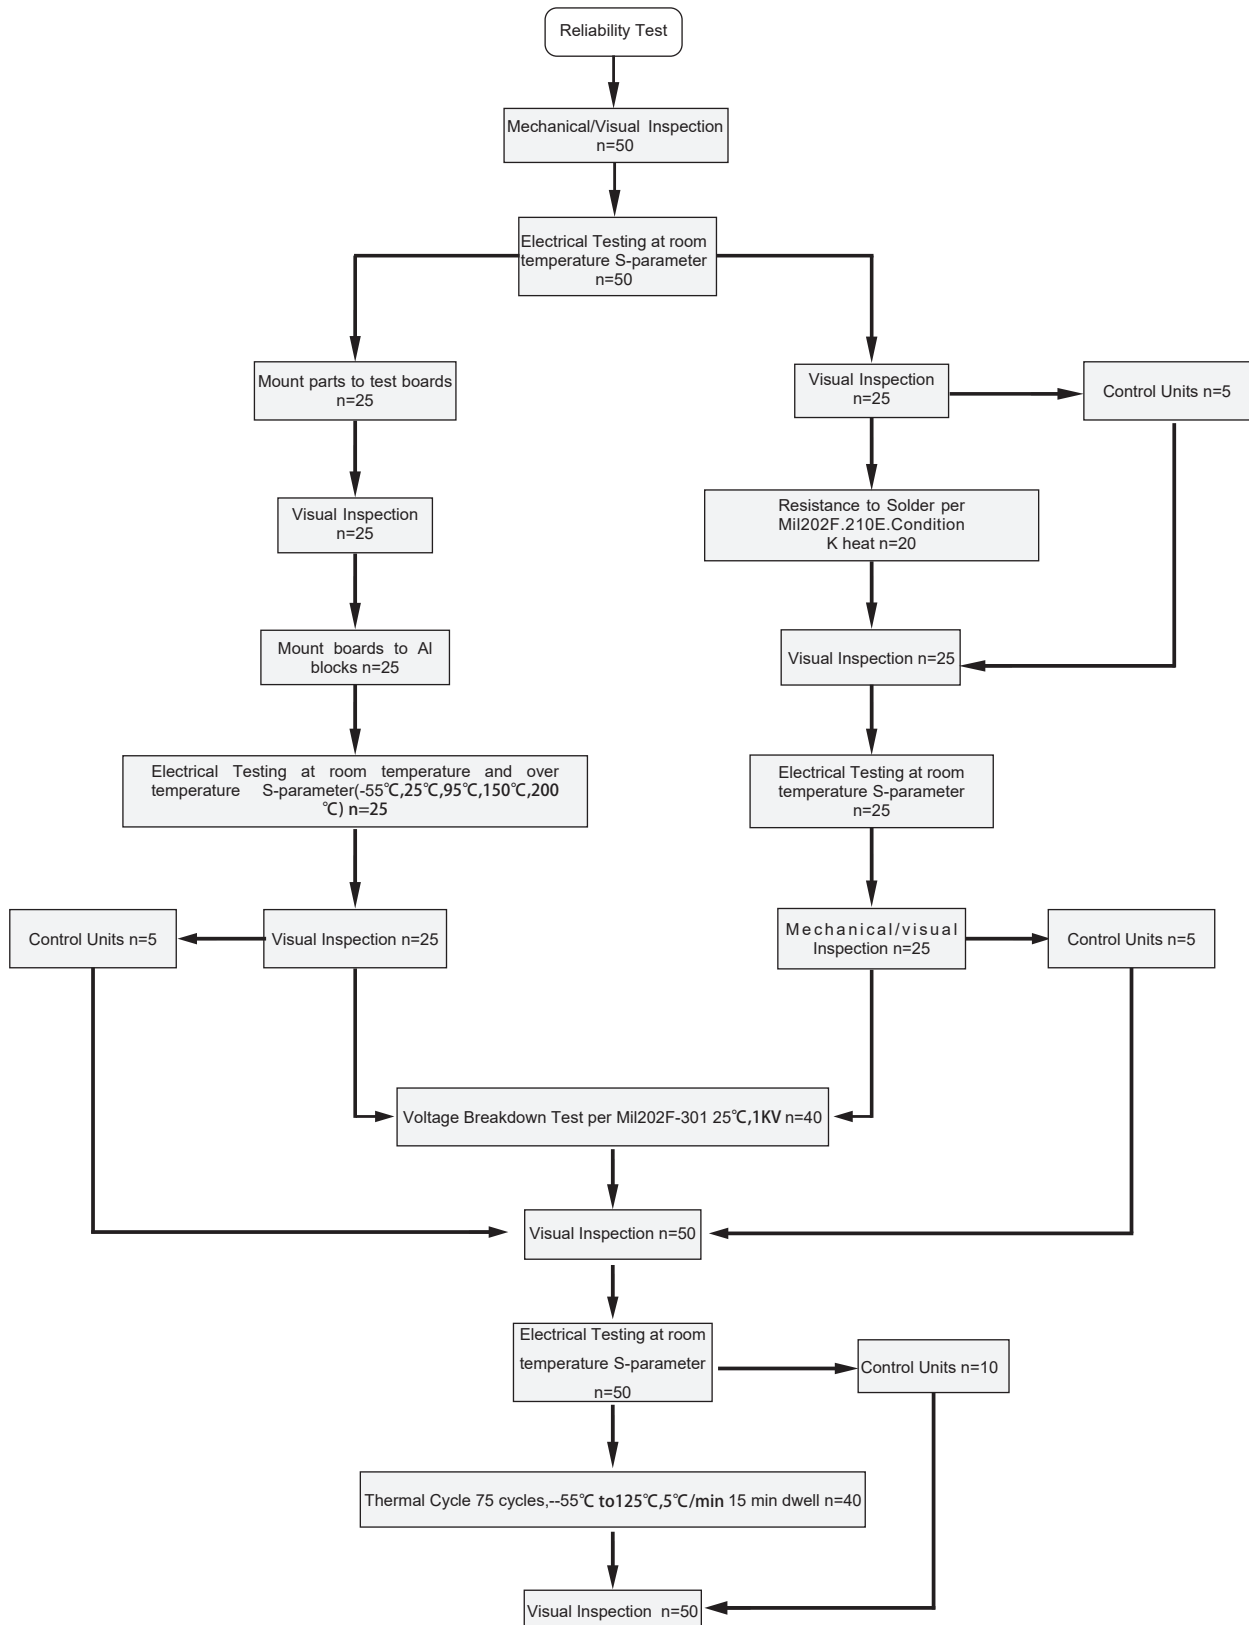


#### Yantel Corporation

Add: 3F, Building 3, Southern District 2 of Zhongguan Honghualing Industrial Park, Xili, Nanshan, Shenzhen, China  
Tel: 86-755-8355-1886 Fax: 86-755-8355-2533

For detailed performance specs & shopping online see Yantel web site : [www.yantel-corp.com](http://www.yantel-corp.com)

#### Reliability Test Flow

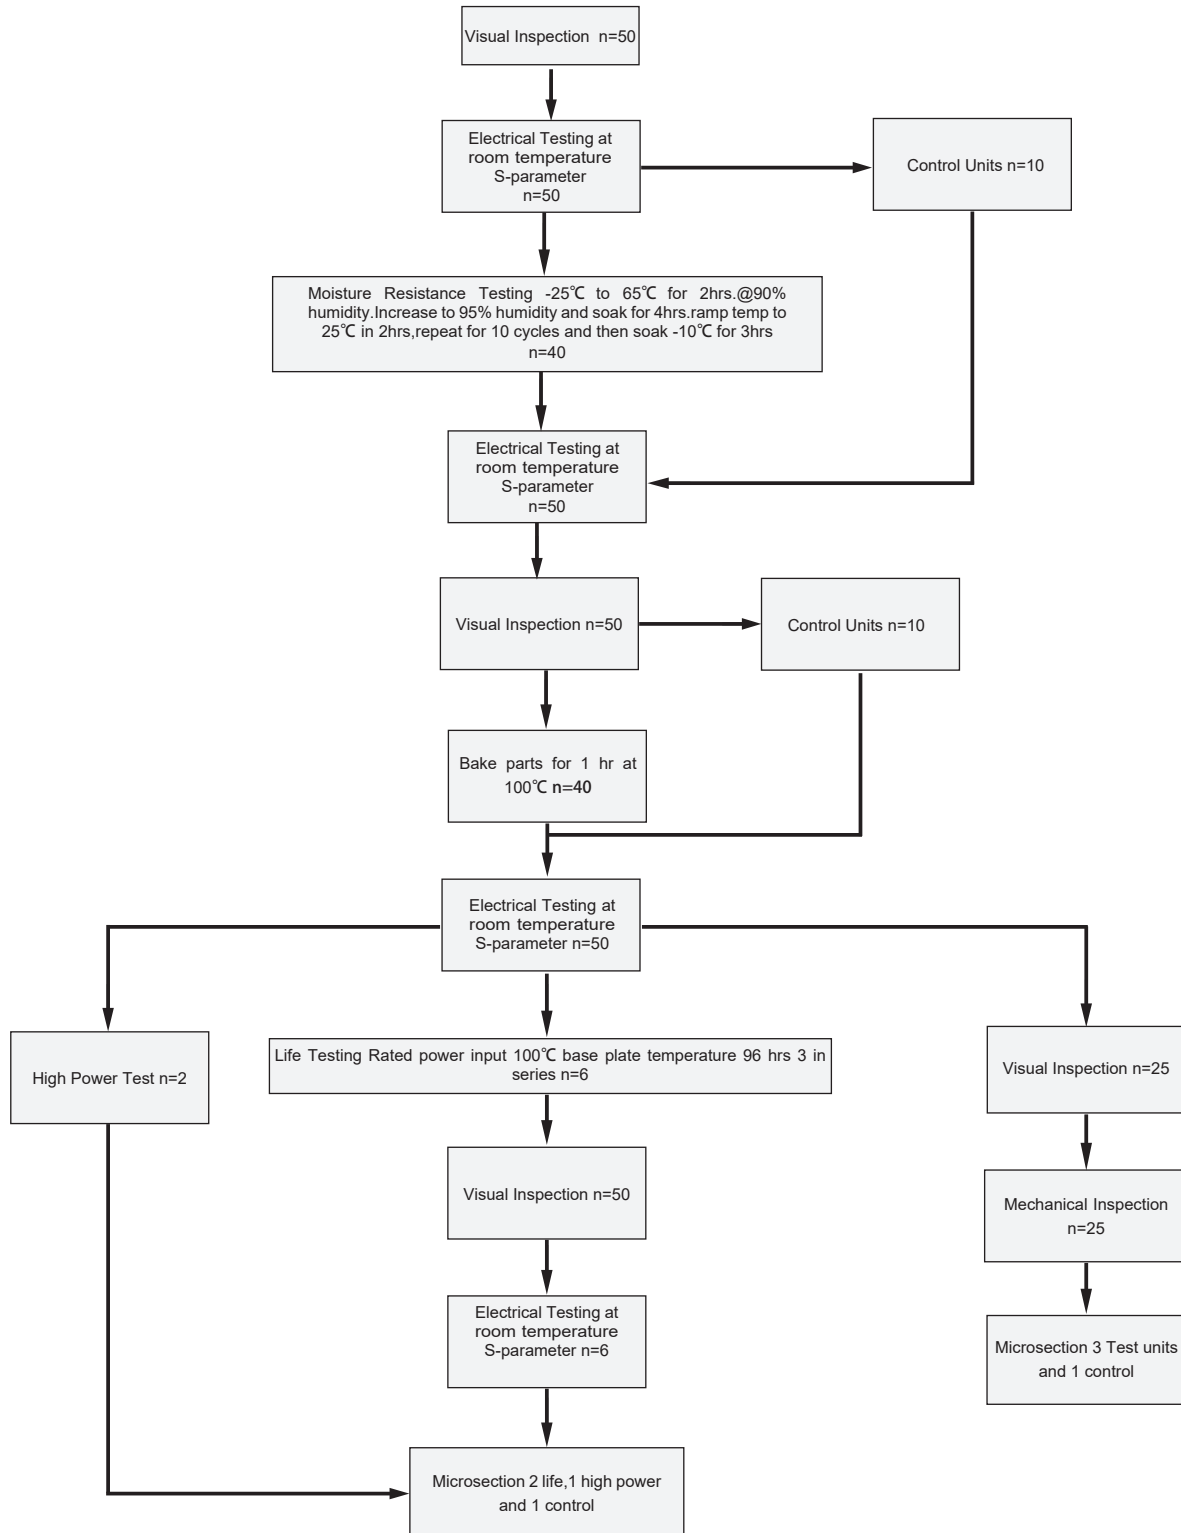


#### Yantel Corporation

Add: 3F, Building 3, Southern District 2 of Zhongguan Honghualing Industrial Park, Xili, Nanshan, Shenzhen, China  
Tel: 86-755-8355-1886 Fax: 86-755-8355-2533

For detailed performance specs & shopping online see Yantel web site : [www.yantel-corp.com](http://www.yantel-corp.com)

#### Tape and Reel Drawing


Feeding Direction

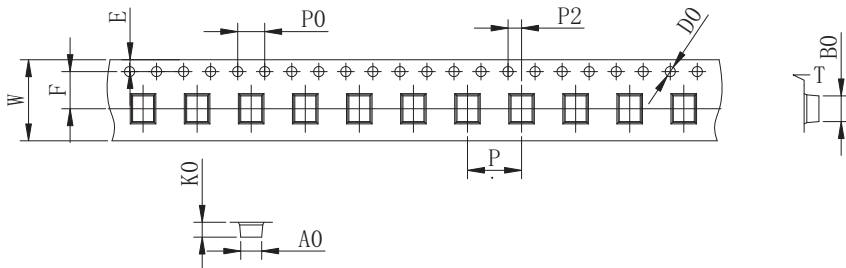


| ITEM    | W              | A0             | B0             | K0             | K1             | P              | F              | E              | D              | P0             | P2             | t              | γ°      |
|---------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|---------|
| DIM(mm) | 12.0           | 3.45           | 5.35           | 2.0            |                | 8              | 5.5            | 1.75           | 1.50           | 4.00           | 2.00           | 0.30           | P/R     |
| TOLE    | +0.30<br>-0.30 | +0.10<br>-0.10 | +0.10<br>-0.10 | +0.10<br>-0.10 | +0.10<br>-0.10 | +0.10<br>-0.10 | +0.10<br>-0.10 | +0.10<br>-0.10 | +0.10<br>-0.00 | +0.10<br>-0.10 | +0.10<br>-0.10 | +0.05<br>-0.05 | 1000pcs |

Notice:

- A.10 Sprocket hole pitch cumulative tolerance is 0.2mm.
- B. Carrier camber shall be not more than 1mm per 100mm through a length of 250mm.
- C. All dimensions meet EIA-418-B requirements.
- D. A0 & B0 measured as indicated.
- E. K0 measured from a place on the inside bottom of the pocket to top surface of carrier.
- F. Material: PE 100
- G. Thickness: 0.30±0.05mm
- H. 1000 units (maximum) / T&R

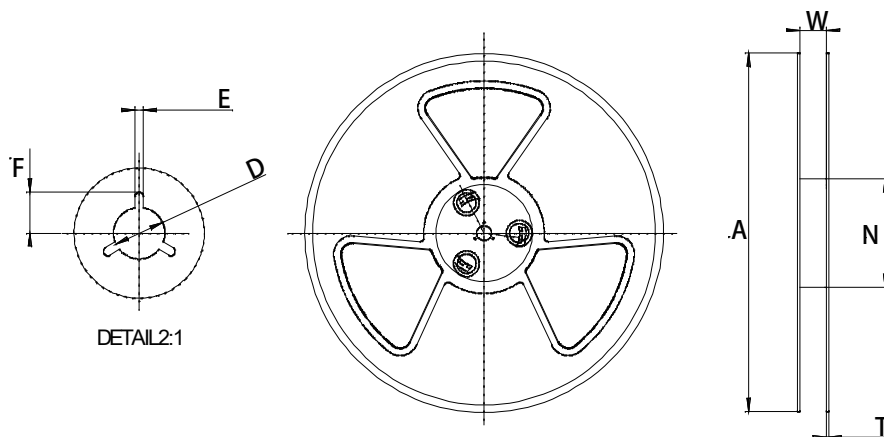

| Symbol | Dimensions(mm) |
|--------|----------------|
| W      | 12.5±0.4       |
| A      | 177±0.5        |
| N      | 63±0.3         |
| T      | 1.8±0.2        |
| E      | 2.1±0.3        |
| F      | 10.75±0.3      |
| D      | 13.5+0.5/-0.2  |

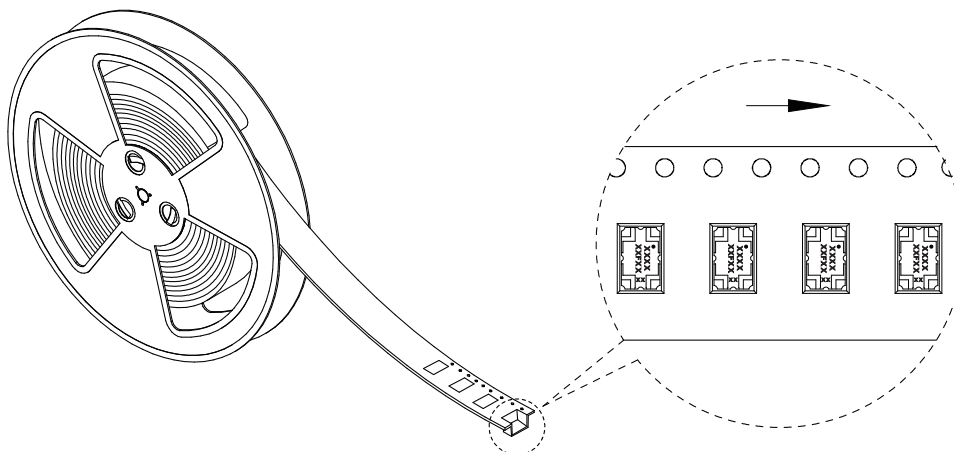

#### Yantel Corporation

Add: 3F, Building 3, Southern District 2 of Zhongguan Honghualing Industrial Park, Xili, Nanshan, Shenzhen, China  
Tel: 86-755-8355-1886 Fax: 86-755-8355-2533

For detailed performance specs & shopping online see Yantel web site : [www.yantel-corp.com](http://www.yantel-corp.com)