

### Fixed Attenuator

- ◆ DC to 6 GHz
- ◆ 50 dB
- ◆ 2 Watt
- ◆ N Type Connectors

#### Features

- High attenuation accuracy
- Small VSWR
- Nickel-plated brass
- Ceramic chip
- Low cost-high performance

#### Model No. Description

FATXXXXXX

- X- power handling: 2W or 5W.
- X- connector type: SMA, N type or SMB connector.
- XX- attenuation: \*\*dB.
- XX- 06 represents type number

#### Specifications


Frequency Range	DC to 6 GHz
Attenuation	50 dB
Attenuation Accuracy (Max.)	±1.5 dB over DC - 6 GHz
Nominal Impedance	50 Ohm
Average Power	2 Watt
Operating Temperature	-55 °C to +125°C
Storage Temperature	-55 °C to +125°C

#### Note:

**AVERAGE POWER:** 2W average to 25°C to 85°C ambient temperature, derated linearly to 0.2W @ 125°C.

FREQ. RANGE (GHz)	Typical VSWR(:1)	Maximum VSWR(:1)
DC to 3	1.15	
3 to 4	1.20	
4 to 6	1.25	
DC to 6		1.3

#### Package Outlines

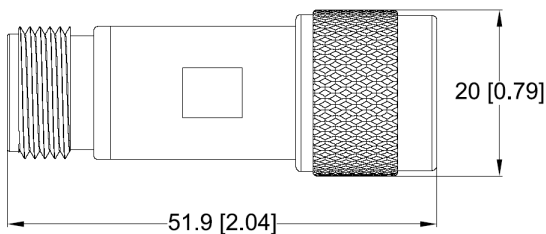

Package type: N

Note: all dimensions shown in mm & inch

#### Material & Plating

Parts	Material	Plating(Micro-inch)
Body & Nut	Brass	Ternary alloy
Contact (female & male)	QSn6.5-0.1	Gold 30
Insulator	Teflon	

#### Yantel Corporation

Add: 3F, Building 3, Southern District 2 of Zhongguan Honghualing Industrial Park, Xili, Nanshan, Shenzhen, China  
Tel: 86-755-8355-1886 Fax: 86-755-8355-2533

For detailed performance specs & shopping online see Yantel web site : [www.yantel-corp.com](http://www.yantel-corp.com)