


Part No. Descriptions

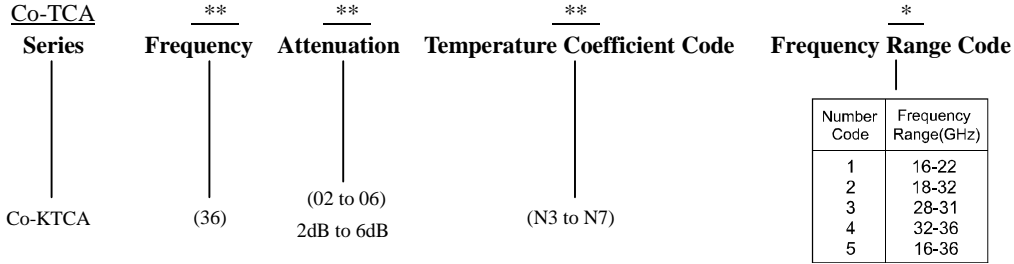

| Part No.       | Frequency Range Code | Attenuation (dB) | Temperature Coefficient Code | Temperature Coefficient of Attenuation (dB/dB/°C) | Typ. VSWR (:1) @25°C | Max. Input Power (mW) | Attenuation Accuracy (dB) |
|----------------|----------------------|------------------|------------------------------|---|----------------------|-----------------------|---------------------------|
| Co-KTCA3602N** | 1-5                  | 2                | N3~N7                        | -0.003~-0.007                                     | 1.50                 | 100                   | ±1.0                      |
| Co-KTCA3603N** | 1-5                  | 3                | N3~N7                        | -0.003~-0.007                                     | 1.50                 | 100                   | ±1.0                      |
| Co-KTCA3604N** | 1-5                  | 4                | N3~N7                        | -0.003~-0.007                                     | 1.50                 | 100                   | ±1.0                      |
| Co-KTCA3605N** | 1-5                  | 5                | N3~N7                        | -0.003~-0.007                                     | 1.50                 | 100                   | ±1.0                      |
| Co-KTCA3606N** | 1-5                  | 6                | N3~N7                        | -0.003~-0.007                                     | 1.50                 | 100                   | ±1.0                      |

General Specifications

- Frequency Range: 32 to 36GHz
- Attenuation: 3dB
- Attenuation Accuracy: at 25°C ±1.0dB Typical
- VSWR: at 25°C 1.50:1 Typical
- Nominal Impedance: 50 Ohms
- Power Rating: 100 mW CW
- Power Derating: 100% @ 100°C  
Derates to 0% @ 150°C
- Operating Temperature: -55°C to +150°C
- Temperature Coefficient over Operating Temperature Range: See Table Above.  
Temperature Coefficient Tolerance: ±0.001dB/dB/°C.
- Substrate: Alumina (Al<sub>2</sub>O<sub>3</sub>)
- Resistive material: Thick film
- Terminal material: Thick film, Input, Output and front Ground all made by gold, Back Ground made by Pd/Ag.
- Protective Coating: Thick film (ethyl acetate)
- Package Outline: See Sheet 4.
- Workmanship: per MIL-PRF-55342.
- RoHS Compliant.
- Electrostatic Discharge Control: per MIL-STD-1686.


**Unit Marking** dB Value (XX), Direction of Shift (N) and TCA Shift (X).  
Legibility and Permanency: per MIL-STD-130.

Quality Assurance

- Sample inspect per ANSI/ASQC Z1.4 general inspection, LEVEL II, AQL = 1.0.
  - Visual and mechanical examination for conformance to outline package requirements.
- Select five (5) Units from lot measure attenuation from 32 to 36GHz every 20°C over the temperature range -55°C to +125°C.
  - Calculate, using linear regression, the slope of the curve.
  - Calculate TCA using the following formula: TCA = Slope / Attenuation @ 25°C.
- Test data required for customer.

Package Outlines

All dimensions shown in mm unless stated otherwise

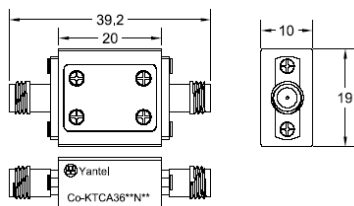

Yantel Corporation

Add: 3F, Building 3, Southern District 2 of Zhongguan Honghualing Industrial Park, Xili, Nanshan, Shenzhen, China  
Tel: 86-755-8355-1886 Fax: 86-755-8355-2533

For detailed performance specs & shopping online see Yantel web site : [www.yantel-corp.com](http://www.yantel-corp.com)