

Microstrip SMD Circulatorz

◆ 8 to 12 GHz

◆ 50 Ω

◆ 20 W

Features


- Thin film
- Low insertion loss
- High isolation
- High stability and reliability



Specifications

ITEM	UNIT	Specification	NOTE
Frequency Range	GHz	8 ~ 12	
Direction		CW	P1→P2→P3
Insertion Loss	dB max.	0.6	Over Temp(-40 °C to +85 °C)
Isolation	dB min.	15	Over Temp(-40 °C to +85 °C)
Return Loss	dB min.	15	Over Temp(-40 °C to +85 °C)
Impedance	Ω	50	
Peak Power	W	20	
Operating Temperature	°C	-40 ~ +85	

Package Outlines

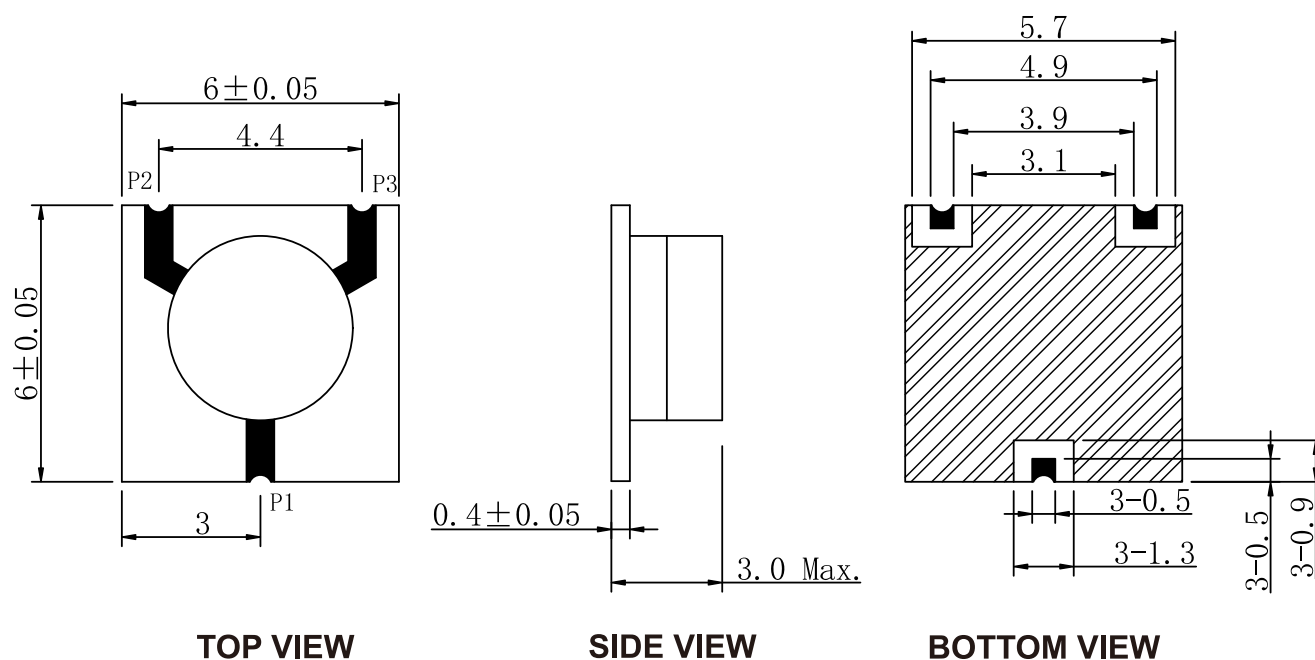

Typical Electrical Characteristics (T=25°C)

