


Part No. Descriptions

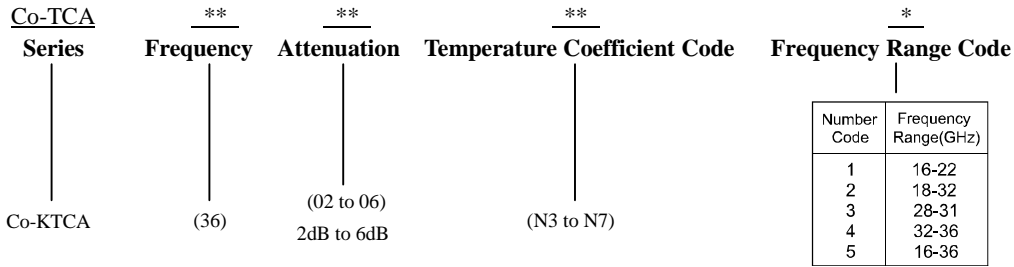

| Part No. | Frequency Range Code | Attenuation (dB) | Temperature Coefficient Code | Temperature Coefficient of Attenuation (dB/dB/°C) | Typ. VSWR (:1) @25°C | Max. Input Power (mW) | Attenuation Accuracy (dB) |
|----------------|----------------------|------------------|------------------------------|---|----------------------|-----------------------|---------------------------|
| Co-KTCA3602N** | 1-5 | 2 | N3~N7 | -0.003~-0.007 | 1.50 | 100 | ±1.0 |
| Co-KTCA3603N** | 1-5 | 3 | N3~N7 | -0.003~-0.007 | 1.50 | 100 | ±1.0 |
| Co-KTCA3604N** | 1-5 | 4 | N3~N7 | -0.003~-0.007 | 1.50 | 100 | ±1.0 |
| Co-KTCA3605N** | 1-5 | 5 | N3~N7 | -0.003~-0.007 | 1.50 | 100 | ±1.0 |
| Co-KTCA3606N** | 1-5 | 6 | N3~N7 | -0.003~-0.007 | 1.50 | 100 | ±1.0 |

General Specifications

- Frequency Range 18 to 32GHz
- Attenuation 5dB
- Attenuation Accuracy at 25°C ±1.0dB Typical
- VSWR at 25°C 1.50:1 Typical
- Nominal Impedance 50 Ohms
- Power Rating 100 mW CW
- Power Derating 100% @ 100°C
Derates to 0% @ 150°C
- Operating Temperature -55°C to +150°C
- Temperature Coefficient over Operating Temperature Range: See Table Above.
Temperature Coefficient Tolerance: ±0.001dB/dB/°C.
- Substrate: Alumina (Al₂O₃)
- Resistive material: Thick film
- Terminal material: Thick film, Input, Output and front Ground all made by gold, Back Ground made by Pd/Ag.
- Protective Coating: Thick film (ethyl acetate)
- Package Outline: See Sheet 4.
- Workmanship: per MIL-PRF-55342.
- RoHS Compliant.
- Electrostatic Discharge Control: per MIL-STD-1686.

Unit Marking dB Value (XX), Direction of Shift (N) and TCA Shift (X).
Legibility and Permanency: per MIL-STD-130.

Quality Assurance

- Sample inspect per ANSI/ASQC Z1.4 general inspection, LEVEL II, AQL = 1.0.
 - Visual and mechanical examination for conformance to outline package requirements.
- Select five (5) Units from lot measure attenuation from 18 to 32GHz every 20°C over the temperature range -55°C to +125°C.
 - Calculate, using linear regression, the slope of the curve.
 - Calculate TCA using the following formula: TCA = Slope / Attenuation @ 25°C.
- Test data required for customer.

Package Outlines

All dimensions shown in mm unless stated otherwise

